
Commercial Floor Burnishers



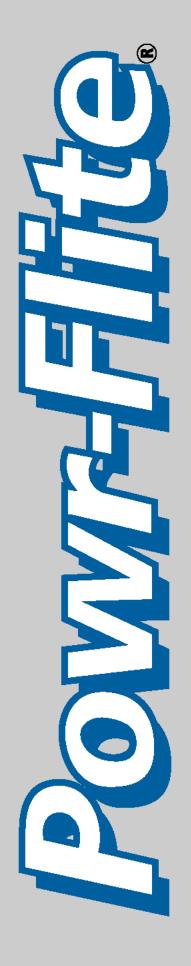

The Professional Choice for Hard Floor Care

CleanCraft Products, Inc. 800-525-3261 www.cleancraft.com

M1200, M1600, M2000 Ultra High Speed Burnishers

All Models Give A Full 20 Inches of Total Pad to Floor Contact

Provides a super high gloss without "cutting" or "rippling" the floor's surface sheen!

Shine your floors for years with trouble-free operation! Powr-Flite ultra high speed burnishers will bring the life back to almost any hard floor surface easily and quickly. These machines offer exceptionally smooth operation with a flexible, self-adjusting pad driver that burnishes unlevel surface areas evenly. Our patented housing design combined with

> precision balanced weight distribution eliminates the need for a compensating caster. The entire pad is touching the

floor, not just a couple of inches like conventional burnishers!

The floating all-steel handle has antifatigue grips, taking the strain off the operator's arms and hands. The industry's toughest left- or right-handed control levers means easy operation from either side of the machine. A safety UL listed 75' cord with heavy-duty steel strain relief comes with each burnisher.

Patented one-piece vented housing...



No compensating caster

Full pad-to-floor contact

Floating handle for easy operation

Easy access to motor and

internal components

P1500 Ultra High Speed Burnisher

Burnish and Remove Scuff and Heel Marks with Total Direct Drive Power!

- Direct drive
- ♦ Patented pad pressure control
- One piece rotational molded housing
- **♦** Easy motor access
- No compensation caster means full pad-to-floor contact

The P1500 burnisher is excellent for scuff and heel-mark removal in heavy-traffic areas. The compact design offers easy maneuverability and total operator control of the pad pressure. If your traffic areas requires weekly maintenance, choose the P1500 for its aggressive floor contact! Rear transport wheels provide smooth and easy mobility.

With total direct drive all power is on the floor for maximum shine capability. Pad pressure stays on the floor with patented pad pressure control.

Pad Diameter	20 Inches Full Pad-to-Floor Contact			
Motor	1-1/2 hp D.C. Rectified, UL Listed			
Transmission	Direct Drive			
Power Cord	75 ft. UL Listed 14/3 SJTW-A			
Base Housing	One Piece, High Density Polyethylene			
Pad Driver	Factory Installed Rigid Block Drive			
Pad Pressure (lbs)	9-17			
Handle Grips	Anti-Fatigue, Soft to the Touch			
Cord Strain Relief	Heavy Duty Metal, Lock Nut and Spring			
Handle Tube	All Chrome 1-1/2 Inch (Fixed)			
Handle Lever	Case Hardened Steel, Positive Lock			
Operating Wheels	4 Inch Non-Marking-Self Lubricating			
Transport Wheels	4 Inch Non-Marking-Self Lubricating			
Wiring	All Completely Enclosed in Housing			
Switch Housing	Non Conductive- Commercial Grade			
Operation Control	Dual Lever On-Off Safety Switch			
	Stress Absorbing. Left or Right Hand.			
Warranty	10 Yrs Housing, 2 Yrs. Motor, 1 Yr. On			
	Parts & Workmanship			
Work Rating (ft2 / hr)	22,000			
Shipping Weight	85 lbs.			



7,000 N

200 st

1000 A

Pad Diameter	20 Inches Full Pad-to-Floor Contact				
Motor	1-1/2 hp D.C. Rectified, UL Listed				
Transmission	Direct Drive				
	No Slip Deep "Y" Belt Drive				
Power Cord	75 ft. UL Listed 14/3 SJTW-A				
	75 ft. UL Listed 12/3 SJTW-A				
Base Housing	One Piece, High Density Polyethylene				
Pad Driver	Factory Installed Rigid Block Drive				
	Flexible, Total 20" Floor-to-Pad Contact				
Pad Pressure (lbs)		13	9-17	15	16
Handle Grips	Anti-Fatigue, Soft to the Touch				
Cord Strain Relief	Heavy Duty Metal, Lock Nut and Spring				
Handle Tube	All Chrome 1-1/2 Inch (Fixed)				
	All Chrome 1-1/2 Inch (Floating)				
Handle Lever	Case Hardened Steel, Positive Lock				
Operating Wheels	5 Inch Non-Marking-Self Lubricating				
	4 Inch Non-Marking-Self Lubricating				
Transport Wheels	4 Inch Non-Marking-Self Lubricating				
Wiring	All Completely Enclosed in Housing				
Switch Housing	Non Conductive- Commercial Grade				
Operation Control	Dual Lever On-Off Safety Switch	_	_	_	_
	Stress Absorbing. Left or Right Hand.				
Warranty	10 Yrs Housing, 2 Yrs. Motor, 1 Yr. On	_	_	_	_
	Parts & Workmanship	•	•	_	_
Work Rating (ft2 / hr)		23 ,500	22,000	23, 500	26, 000
Shipping Weight		89 lbs.	85 lbs.	89 lbs.	89 lbs.

If Your Burnisher is Not a Powr-Flite, Chances Are it WILL FAIL the Pad Pressure Test.

Take a look at the used pad currently on your burnisher. Is the pad worn completely or just partly? The wear on the pad indicates the amount of pad pressure on the floor (if the pad shows only an inch of wear, then you are burnishing only an inch at a time).

With that kind of performance, you have to make more passes on the floor, wasting your time, energy and money. Think of the savings if your pad covered more area.

With the Powr-Hite Burnishing Fleet, you get Total Pad-to-Floor Contact. With each pass you make, the pad covers evenly and completely. No wasted time. No wasted energy. No wasted money.

The design and engineering of the Powr-Flite line provides superior performance and precision balance without the need for a compensating caster. Not only are Powr-Flite burnishers more maneuverable, but there is no wheel to prevent the pad from covering the floor.

With Powr-Flite, you can pass the Pad Pressure Test...

And Shine Flat or Uneven Floors!

Safety Features

One Piece Base and Motor Housing!



Non-Conductive Base & Motor Housings!



Completely Enclosed Capacitors!



No Exposed Wires!



